

(1) CERTIFICATE

(2) No. of the Certificate: **ZP/B047/15-PZ**

(3) Product: **Anchor device type A
Type: ABS-Lock® X-H-14+2**

(4) Manufacturer: **ABS Safety GmbH**

(5) Address: **Gewerbering 3, 47623 Kevelaer**

(6) The design of this product and any acceptable variation thereto are specified in the appendix to this certificate.

(7) The Certification Body of DEKRA EXAM GmbH certifies that this product comply with the requirements of the test regulations listed under item 8 below. The test results are recorded in test report PB 15-057.

(8) The requirements are assured by compliance with

DIN EN 795:2012

CEN/TS 16415:2013

(9) This certificate relates only to the design and tests of the specified product in accordance to the contemplated requirements. Further requirements applied to the manufacturing process and supply of this product, are not covered by this certificate.

(10) The manufacturer is authorised to apply the mark of conformity to the products that conform to the types examined.

(11) This certificate is valid until 15.06.2020.



DEKRA EXAM GmbH
Bochum, 16.06.2015

Signed: Wiegand
Certification Body

Signed: Mühlenbruch
Special services unit

We confirm the correctness of the translation from the German original. In the case of arbitration only the German wording shall be valid and binding.

Certification body

Special services unit

(12) Appendix to

(13) **Certificate**
ZP/B047/15-PZ

(14) 14.1 Subject and type
Anchor device type A
Type: ABS-Lock® X-H-14+2

14.2 Description

The anchor device type ABS-Lock® X-H-14+2 (figure 1) is used to protect a maximum number of three persons simultaneously against falls from a height.

The anchor device consists of a square base plate 200 mm x 200 mm x 5 mm and a vertically standing round bar Ø 16 mm that is welded to the plate.

Additionally, the anchor device is provided at the lower end with a 17 mm high support sleeve that is also welded to the base plate.

At the upper end of the round bar an external thread M16 is attached with an eyelet screwed secured by a lock nut DIN 934. The screw locking is secured by an industrial high-performance adhesive.

The user connects his personal protective equipment against falls from a height to the eyelet that is screwed secured at the upper end of the support. The attachment of the anchor device to the building takes place by 14 wafer-head wood screws, type: round-head screw SP-Drill 6 x 60 and two wafer-head screws SP-Drill 6 x 100 on the wooden construction.

Overall, the anchor device has a height of 150 to 600 mm.

The anchor device is made of corrosion resistant steel 1.4301.

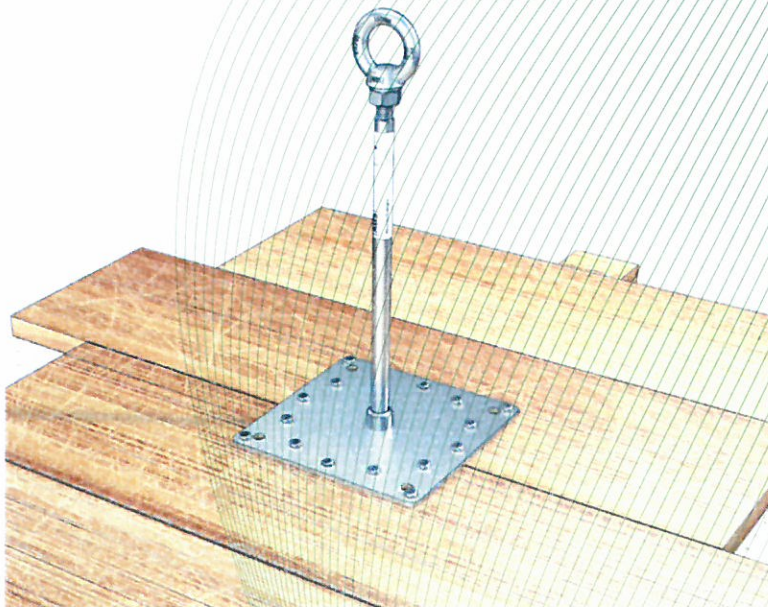


Fig. 1: Anchor device, type: ABS-Lock® X-H-14+2

(15) Test Report

PB 15-057, 10.06.2015