

(1)

# CERTIFICATE

(2) No. of the Certificate:

**ZP/B140/15-PZ**

(3) Product:

**Anchor device type A  
Type: ABS-Lock® III-B**

(4) Manufacturer:

**ABS Safety GmbH**

(5) Address:

**Gewerbering 3, 47623 Kevelaer, Germany**

(6) The design of this product and any acceptable variation thereto are specified in the appendix to this certificate.

(7) The Certification Body of DEKRA EXAM GmbH certifies that this product complies with the requirements of the test regulations listed under item 8 below. The test results are recorded in test report PB 15-137.

(8) The requirements are assured by compliance with

**DIN EN 795:2012**

**DIN CEN/TS 16415:2013**

(9) This certificate relates only to the design and tests of the specified product in accordance to the contemplated requirements. Further requirements applied to the manufacturing process and supply of this product, are not covered by this certificate.

(10) The manufacturer is authorised to apply the mark of conformity to the products that conform to the types examined.

(11) This certificate is valid until 2021-01-24.

DEKRA EXAM GmbH  
Bochum, 2016-01-25



Signed: Wiegand  
Certification Body

Signed: Mühlenbruch  
Special services unit

We confirm the correctness of the translation from the German original.  
In the case of arbitration only the German wording shall be valid and binding.

  
Certification body

  
Special services unit



(12) Appendix to

(13) **Certificate**  
**ZP/B140/15-PZ**

(14) 14.1 Subject and type  
Anchor device type A  
Type: ABS-Lock® III-B

14.2 Description

The anchor device of type ABS-Lock® III-B (fig. 1) is a single anchor point that is used to protect a maximum number of three persons against falls from a height. The assembly is done by cementing the equipment in concrete of sufficient strength.

If the assembly is done without a projection, a threaded rod (Ø 16 mm) is used. Here, the foot of the ring-shaped eyelet finishes in line with the surface of the building. The rod is 100 mm long. As an alternative to the assembly in line with the surface, there is also a variant where there is some projection. This variant requires a support (Ø 16 mm) of the anchor device that has a height between 50 mm and 600 mm. At both ends, a thread has been worked. At the top end of the support there is a ring-shaped eyelet M16 securely screw-fastened. The ring-shaped eyelets are there to receive the user's PPE to protect him against falls from a height. The anchor device consists of corrosion-resistant steel and is intended for load from any direction.

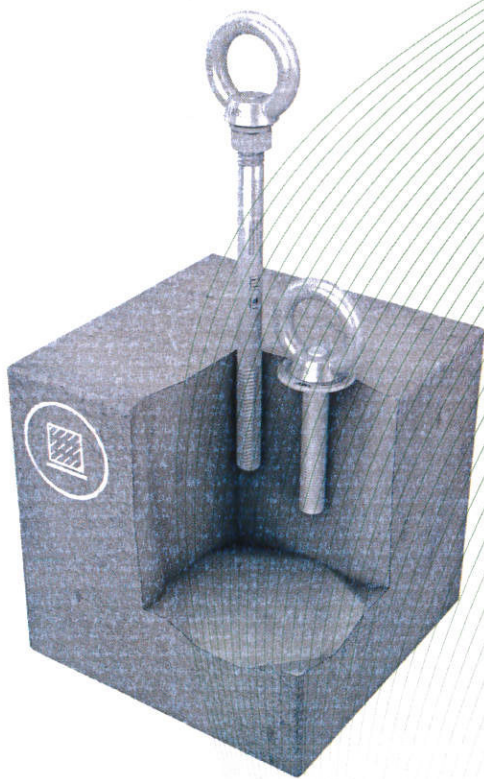


Fig. 1: Anchor device, type: ABS-Lock® III-B

(15) Test Report

PB 15-137, 2016-01-25