

(1) CERTIFICATE

- (2) No. of the Certificate: **ZP/B141/15-PZ**
- (3) Product: **Anchor device type A
Type: ABS-Lock® III-BE**
- (4) Manufacturer: **ABS Safety GmbH**
- (5) Address: **Gewerbering 3, 47623 Kevelaer, Germany**
- (6) The design of this product and any acceptable variation thereto are specified in the appendix to this certificate.
- (7) The Certification Body of DEKRA EXAM GmbH certifies that this product comply with the requirements of the test regulations listed under item 8 below. The test results are recorded in test report PB 15-139.
- (8) The requirements are assured by compliance with
DIN EN 795:2012 **CEN/TS 16415:2013**
- (9) This certificate relates only to the design and tests of the specified product in accordance to the contemplated requirements. Further requirements applied to the manufacturing process and supply of this product, are not covered by this certificate.
- (10) The manufacturer is authorised to apply the mark of conformity to the products that conform to the types examined.
- (11) This certificate is valid until 2021-01-24.


DEKRA EXAM GmbH
Bochum, 2016-01-25

Signed: Wiegand
Certification Body

Signed: Mühlenbruch
Special services unit



We confirm the correctness of the translation from the German original.
In the case of arbitration only the German wording shall be valid and binding.

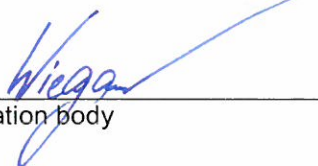
Certification body


Special services unit

(12) Appendix to

(13) **Certificate**
ZP/B141/15-PZ

(14) 14.1 Subject and type
Anchor device type A
Type: ABS-Lock® III-BE

14.2 Description

The anchor device of type ABS-Lock® III-BE (fig. 1) is a single anchor point that is used to protect a maximum number of three persons against falls from a height. The assembly is done in concrete or steel fiber concrete foundations of sufficient strength by means of drive-in-dowels.

The support (Ø 16 mm) is between 200 mm and 600 mm high. At the top end of the support there is a ring-shaped eyelet M16 securely screw-fastened. The user can protect himself against falls from a height by connecting his personal protective equipment to the eyelet. The anchor device consists of corrosion-resistant steel and is intended for load from any direction parallel to the surface of the building.

Instead of the ring-shaped eyelet the mounting of line rails for wire rope systems of types ABS-Lock® SYS II or SYS IV of ABS Safety GmbH is also possible. Therefore the anchor device is found as an end or intermediate anchor point of said wire-rope systems.

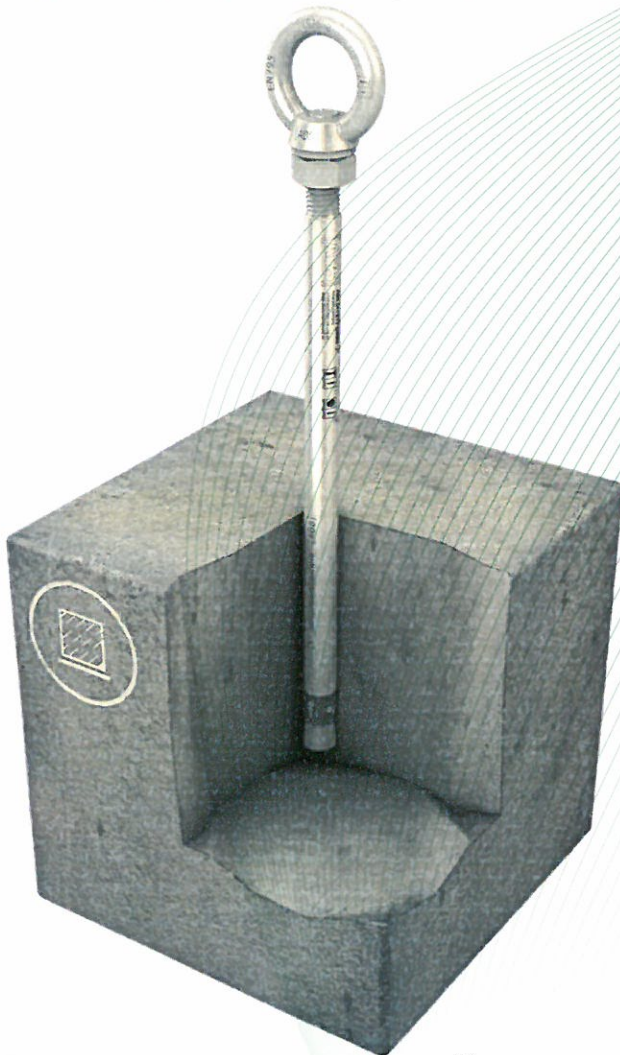


Fig. 1: Anchor device, type: ABS-Lock® III-BE

(15) Test Report

PB 15-139, 2016-01-25